

ETERLEY, Nikolay Semenovich; GANELIN, A.M., nauchnyy red.; CHIRKOV,
A.Ye., nauchnyy red.; VINOKUR, I.Ye., red.; NESMYSLOVA,
L.M., tekhn.-red.

[Electric power plants, substations, lines, and power-
distribution networks] Elektricheskie stantsii, podstantsii,
linii i seti. Moskva, Proftekhizdat, 1962. 239 p.

(MIRA 16:2)

(Electric power distribution)

(Electric power plants)

ETEMAN, A., kand.khim.nauk

Semiconductor as heater. Mest.prom.i khud.promys. 3 no.1:28-29
Ja '62. (MIRA 15:2)

(Semiconductors)
(Pressing of garments)

ETTERMAN, A.I., kand. khimicheskikh nauk; LEYMAN, Ye.Ya., mladshiy
nauchnyy sotrudnik; LEYMAN, S. Ya., inzh.

Heating of garment pressing systems by means of ferrosilicon
semiconductor plates. Nauch.-issl. trudy TSNiShveiproma no.11:
85-107 '62 (MIRA 17:7)

ETERMAN, A.I., kand. khimicheskikh nauk; LEYMAN, Ye.Ya., mladshiy nauchnyy
sotrudnik

Heating of garment pressing equipment by means of current-conducting
films. Nauch.-issl. trudy TSNIIShveiproma no.12:79-85 '63.
(MIRA 17:9)

ETERMAN, A. I.

Automatic determination of carbon monoxide in gas mixtures containing hydrogen. A. I. Eterman and I. S. Afanas'ev. *Zarodskaya Lab.* 9, 444-7 (1940).—The detn. of CO in H₂-contg. gas mixts. is based on the hydrogenation of CO to CH₄ in the presence of Ni-Al catalyst in a modified mono-duplex gas analyzer. The analysis is carried out in two stages. In the first stage the CO₂ is absorbed in alkali. In the second stage the CO₂ is absorbed in alkali and then the residual gas is passed into an elec. oven where the CO is hydrogenated to CH₄. The vol. of the residual gas is then subtracted to obtain the sum of the CO₂ and CO, which is subtracted from the CO₂ detd. in the first stage. The app. has been used for over seven months and the differences between the analytical detns. of CO and those made by this app. did not exceed 0.1-0.2%. Diagram of the app. is included.

H. Z. Kamich

ETERMAN, A.I.

D'YACHENKO, P.Ye., doktor tekhnicheskikh nauk; D'YACHKOV, A.K., doktor tekhnicheskikh nauk, redaktor; ETERMAN, A.I., redaktor; MAKUNI, Ye.V., tekhnicheskii redaktor.

[Radioactive isotopes in machine building] Radioaktivnye izotopy v mashinostroenii. Moskva, Izd-vo Akademii nauk SSSR, 1956. 50 p. (MLRA 9:6)

(Radioisotopes--Industrial applications)(Physical metallurgy)
(Machinery industry)

004/58-59-4-15191

Translation From: Referativnyy Zhurnal Fizika, 1959, Nr 7, p 86 (USSR)

AUTHORS: Eterman, A.I., Kurbatova, N M.

TITLE: Study of the Physico-Chemical Properties of New Organic Heat-Transfer
Agents ²¹ ✓

PERIODICAL: Sb. nauchn. rabot. Tsentr. Konstrukt. byuro torg. mashinostr. Upr. torg.
oborud. M-va torg. USSR, 1958, Nr 2, pp 104 - 115

ABSTRACT: The article has not been reviewed.

Card 1/1

ETERMAN, A.

Synthetic polymer materials. Sov. torg. no.8:20-24 Ag '58.
(Synthetic products) (MIRA 11:9)

ETERMAN, A.I.

~~KA-150~~ potato peeler with replaceable abrasive facing. Kons. 1 ov.
prom. 13 no.4:17-19 Ap '58. (MIRA 11:4)

1. TSentral'noye konstruktorskoye byuro torgovogo mashinostroyeniya.
(Potatoes) (Food industry--Equipment and supplies)

5(4)

AUTHORS:

Eterman, A. I. and Kurbatova, N. M.

SOV/76-32-12-23/32

TITLE:

The Physico-Chemical Properties of Some Hydrocarbons of the Diphenyl Methane Series (Fiziko-khimicheskiye svoystva nekotorykh uglevodorodov difenilmetanovogo ryada)

PERIODICAL:

Zhurnal fizicheskoy khimii, 1958, Vol 32, Nr 12, pp 2803-2809 (USSR)

ABSTRACT:

Among the liquid diaryl methanes suggested by I. G. Matveyev, N. I. Gel'perin, D. A. Drapkina and others (Ref 1) as heat transferring agents of high temperature stability there are ditolyl methane and dicumyl methane. Investigations were made of their surface stresses, viscosities and densities as well as of the dependence of these values of temperatures between 20° and 250° C. Furthermore, the relation between surface stress and molecular volume was established. The results were interpreted according to the theory of absolute reaction velocities. The activating energy values and the variations of the activating entropy of the dynamic viscosity were calculated. The results were: 1. surface stress and density show a linear decrease with rising temperatures, 2. between 20° and 100° C, viscosity sinks

Card 1/2

The Physico-Chemical Properties of Some Hydrocarbons
of the Diphenyl Methane Series

SOV/76-32-12-23/34

rapidly, then the curve flattens out, 3. there is a relation between density and surface tension of non-associated liquids according to A. I. Bachinskiy's formula (Ref 10):

$$\frac{M (\gamma)^{\frac{1}{2}}}{D} = P = \text{const.}$$

M - surface stress, D - density, γ - molecular weight,
P - a quantity independent of temperature, the parachor
introduced by Segden Professor I. R. Krichevskiy helped with
suggestions. There are 4 figures, 6 tables, and 10 references,
9 of which are Soviet.

SUBMITTED: June 12, 1957

Card 2/2

ETERMAN, A. I.; KUIBATOVA, N. M.

Magnetic treatment of water. Shvein.prom. no. 3:20-22 My-Je '59.
(MIRA 12:9)

(Feed-water purification)

FRANKL, F. I., and I. I. ETERMAN

Obtekanie tel, blizhikh k prodolgovatykh ellipsoidam vrashcheniia. (Prikladnaia matematika i mekhanika, 1944, v. 8, no. 1, p. 65-69)

Summary in English;

Title re.: Streamline flow around a body approaching an oblong ellipsoid of revolution.

QA801.P7 1944

SO: Aeronautical Sciences and Aviation in the Soviet Union, Library of Congress, 1955

ETERMAN, I. I.

3000

Eterman, I. I. Distribution of pressure over the surface of a body of revolution in a gas flow of high subsonic velocity. Appl. Math. Mech. [Akad. Nauk SSSR. Prikl. Mat. Mech.] 11, 363-370 (1947). (Russian. English summary)

The author describes computational procedures which may be used in applying Christianovitch's approximate

method for constructing rotationally symmetrical subsonic flows past bodies of revolution [Trudy Central. Aero-Gidrodinam. Inst., no. 481 (1940); these Rev. 7, 39]. As an example he computes the pressure distribution on an ellipsoid of revolution with axes-ratio .215 for the stream Mach number .327.

L. Bers (Syracuse, N. Y.).

Source: Mathematical Reviews,

Vol 9 No. 9

ETERMAN, I. I.

USSR/Aerodynamics

1 May 1947

"Determination of the Surface of a Body of Rotation
With a Given Determined Pressure," I I Eterman, 4 pp

"Dok Akad Nauk USSR Nov Ser" Vol LVI, No 4

1T100

ETERMAN, I. I.

Pressure distribution on bodies of revolution in high subsonic gas flows. Providence, R. I., 1949. 17 p., illus. (Brown University. Graduate Division of Applied Mathematics. Translation no. A9-T-41).

Trans. of Raspredelenie davleniia po telam vrashcheniia pri obtekanii gazom s bol'shimi dozvukovymi skorostiami.

NNIAS RPB

SO: Aeronautical Sciences and Aviation in the Soviet Union, Library of Congress, 1955.

ETERMAN, I. I.

USSR/Automatics and telemechanics - Characteristic equations

FD-3084

Card 1/1 Pub. 10 - 7/8

Author : Eterman, I. I.; Obuvalin, M. I. (Moscow)

Title : ~~Method for solving characteristic equations on electrical modeling devices~~

Periodical : Avtom. i telem., Vol. 16, Nov-Dec 1955, 554-555

Abstract : The author proposes a method for solving equations of the type $p^n + a_{n-1}p^{n-1} + \dots + a_1p + a_0 = 0$, which is characteristic for a given system of regulation. The method has been tested in practice and found to give positive results. The principal idea of the proposed method is the determination of the roots by means of the fixation on a continuous working principle of the transition from stable regime to unstable regime. For such a working principle one can utilize any electrical model constructed on the basis of d-c amplifiers with large coefficient of amplification and with substantial feedback. The author notes that such models have been reported on in detail in the literature, e.g. *ibid.*, No 2, 1953, 164-176. The mentioned transition leads to exponential increase of output voltage and its rapid output beyond the limits of the scales of the measuring devices.

December 18 1953

ETERMAN, I. I., CAnd. in Phys. Math. Sci.

"Features of Programming with the "Ural" Machine" a paper presented at the Conference on Methods of Development of Soviet Mathematical Machine-Building and Instrument-Building, 12-17 March 1956.

Translation No. 596, 8 Oct 56

ETERMAN, I.I.; GORCHINSKAYA, T.D.; KARAVASHKINA, G.I.

Solving mathematical problems on the universal digital computer
"Ural". Priboroostroenie no.5:1-8 My '56. (MLRA 9:8)
(Electronic calculating machines)

and OBUVALIN, M. I.

"On the Solution of Boundary Problems on Continuous Action Devices Intended for the Solution of Cauchy's Problem," by M. I. Obuvalin and I. I. Eterman, Moscow, Inzhenernyy Sbornik, Vol 23, 1956, pp 203-213, submitted for publication 19 Jul 54

Two complementary methods of the solution of boundary problems of mathematical physics and the application of the solution of linear algebraic systems are presented. Examples of the application of the proposed methods to concrete problems are given. The MPT-9 analog computer was used in the computations.

The solution of a great number of technical problems pertaining to boundary problems of the theory of elasticity, the theory of oscillations, and hydromechanics shows the effectiveness of the methods developed and the expediency of their application in many cases.

The aim of this work is a search for solution methods which may be used on analog computers, intended for the solution of Cauchy's problem and of boundary problems pertaining to equations of the type

$$a_n y^{(n)} + a_{n-1} y^{(n-1)} + \dots + a_1 y^{(1)} + a_0 y = f$$

The basic results of this work were presented on 28 November at the Second All-Union Conference on Automatic Control by I. I. Eterman of the SKB (Special Design Bureau) of the Ministry of Machine Building.

Sum 1239

544

PHASE I BOOK EXPLOITATION

Esterman, Izrail' Isayevich

Matematicheskiye mashiny nepreryvnogo deystviya (Mathematical Analog Computers)
Moscow, Mashgiz, 1957. 234 p. 7,500 copies printed.

Reviewer: Kobrinskiy, N. Ye., Professor; Ed.: Solodov, A. V., Candidate of
Technical Sciences; Tech. Ed.: El'kind, V. D.; Ed. of Publishing House:
Kochetova, G. F.; Managing Ed. for literature on machine building and tool
making: Pokrovskiy, N. V.

PURPOSE: This book is addressed to scientific workers and to engineers who
use analog computers in their work. It can also serve as a textbook on the
subject for students of science and technology enrolled in vuzes.

COVERAGE: The monograph explains the theory of analog computers. The various
kinds of problems which can be solved on these machines and ways of check-
ing the correctness of the solutions are discussed. The author reviews the
development of calculating instruments and machines. He enumerates the
three classes of calculating machines: analog computers, discrete action
Card 1/5

544

Mathematical Analog Computers

TABLE OF
CONTENTS:

	3
Preface	5
Ch. I. Dynamic Systems	5
Basic concepts and examples	11
Mathematical characteristics of dynamic systems	22
Ch. II. Continuous Action Systems and Links	22
Block diagrams	29
Mechanical links	36
Electronic links	
Simplification of systems with converters from many variables	53

Card 3/5

544

Mathematical Analog Computers

Presentation of oscillatory processes and special nonlinearities	73
Ch. III. Description of Machines and of Some Procedures for Operating Them	82
Description of electron models	82
Some procedures for operating the machines	91
Ch. IV. Solution of Some Mathematical Problems on Analog Computers	105
Properties of linear systems	105
Solution of linear systems on machines	108
Solution of algebraic equations on machines	113
Solution of boundary value problems with normal derivatives	118

Card 4/5

ETERMAN, Izrail' Isayevich

Analogue computers. New York, London, Pergamon
Press, 1960.

ix, 264 p. illus., diagrs., tables.

Transla ed from the original Russian: Matematiches-
kiye mashiny nepreryvnogo deystviya, Moscow, 1957.

Bibliography: n. 262-264

16.6500

39013
S/140/62/000/003/007/007
C111/C353

AUTHOR: Eterman, I. I.

TITLE: Polynomials of the best approximation and some of their applications

PERIODICAL: Vysshiye uchebnyye zavedeniya. Izvestiya. Matematika, no. 3, 1962, 189-194

TEXT: To determine the polynomial

$P_n(x) = \sum_{i=0}^n c_i x^i$ which best approximates the continuous function $f(x)$

on $0 \leq x \leq 1$, one generally uses a system of order $(2n+4)$ with the unknowns $c_0, c_1, \dots, c_n; \xi_1, \xi_2, \dots, \xi_{n+2}; E_n$, where $E_n = \max |f(x) - P_n(x)|$ and ξ_i are those points where E_n is attained. The author shows that one can reduce the order of the system to $n+2$ by determining ξ_1 from the system

f

Card 1/4

S/140/62/000/003/007/007
C111/C333

Polynomials of the best . . .

$$\Phi_s(\xi_1, \dots, \xi_{n+2}) = \begin{vmatrix} f(\xi_1) - \gamma E_n & 1 & \xi_1 & \xi_1^2 & \dots & \xi_1^n \\ f(\xi_2) + \gamma E_n & 1 & \xi_2 & \xi_2^2 & \dots & \xi_2^n \\ \dots & \dots & \dots & \dots & \dots & \dots \\ f(\xi_{s-1}) + (-1)^{s-1} \gamma E_n & 1 & \xi_{s-1} & \xi_{s-1}^2 & \dots & \xi_{s-1}^n \\ f'(\xi_s) & 0 & 1 & 2\xi_s & \dots & n\xi_s^{n-1} \\ f(\xi_{s+1}) + (-1)^{s+1} \gamma E_n & 1 & \xi_{s+1} & \xi_{s+1}^2 & \dots & \xi_{s+1}^n \\ \dots & \dots & \dots & \dots & \dots & \dots \\ f(\xi_{n+2}) + (-1)^{n+2} \gamma E_n & 1 & \xi_{n+2} & \xi_{n+2}^2 & \dots & \xi_{n+2}^n \end{vmatrix} = 0. \quad (5)$$

where

$$\gamma E_n = \frac{1}{E} \sum_{i=1}^{n+2} (-1)^{i+1} s(i) f(\xi_i) \quad (6)$$

Card 2/4

S/140/62/000/003/007/007
C111/C333

Polynomials of the best . . .

$$E = \sum_{i=1}^{n+2} S(i), S(i) = w(\xi_1, \xi_2, \dots, \xi_{i-1}, \xi_{i+1}, \dots, \xi_{n+2}) \quad (7)$$

and $w(\xi_1, \xi_2, \dots, \xi_{n+2})$ is the Vandermonde determinant. For c_i then the formula

$$c_i = \frac{1}{E} \Delta_i \quad (i=0, 1, \dots, n) \quad (8)$$

holds, where Δ_i arises from w by replacing the i -th column with the

column $\begin{bmatrix} f(\xi_1) \\ \vdots \\ f(\xi_{n+2}) \end{bmatrix}$. The author states without proof that with large n

one can replace the solution of (5) with a simpler approximate solution that leads to polynomials Q_n , which are only slightly different from P_n .

Card 3/4

S/140/62/000/003/007/007
C111/C333

Polynomials of the best . . .

Again without proof, the author mentions the possibility, among others, of using the polynomials Q_n to obtain good difference schemes for the differential equation

$$\frac{dy}{dx} = f(x, y) . \quad (15)$$

The scheme

$$y_{k+4} = y_k + \frac{h}{3} (y'_k + y'_{k+4}) + \frac{5}{3} h \left\{ y' \left[x_k + \frac{2(5-\sqrt{5})}{5} h \right] + \right.$$

$$\left. + y' \left[x_k + \frac{2(5+\sqrt{5})}{5} h \right] \right\} \quad (16)$$

thus obtained has, for example, the remainder $\frac{h^7}{300} \frac{f_k^{(7)}}{7!}$.

ASSOCIATION: Penzenskiy politekhnicheskiy institut (Penza Polytechnic Institute)

SUBMITTED: November 9, 1959
Card 4/4

S/140/62/000/006/006/006
EO31/E435

AUTHOR: Eterman, I.I.

TITLE: Approximations to functions by asymptotic polynomials

PERIODICAL: Izvestiya vysshikh uchebnykh zavedeniy. Matematika.
no.6, 1962, 162-171

TEXT: The author considers a function which is uniformly convergent in the closed interval $(-1, +1)$ and which can be expanded in a series of Chebyshev polynomials. It is assumed that the end points of the interval are among the nodal points over which the approximation to the function is to be constructed. A triangular matrix is constructed which corresponds to the asymptotic solution of the equations for the nodal points. A convenient asymptotic solution is based on the determination of values $\eta_k^{(n)} = \cos(k\pi)/(n+1)$ ($k = 1, 2, \dots, n$). The triangular matrix defines so-called asymptotic polynomials built up from Chebyshev polynomials with the function values at the points $\eta_k^{(n)}$ as coefficients, which have the useful feature of providing an indication of the accuracy of the approximation. A bound is obtained for $|P_n(x) - Q_n(x)|$ where $P_n(x)$ is

Card 1/2

ETERMAN, I.I.

Solution of the inverse problem in the theory of approximation of functions. Uch. zap. PPI no.1:3-9 '63.

Use of asymptotic polynomials in solving certain problems in applied mathematics. Ibid.:10-16 (MIRA 17:2)

L 45405-66 EWT(d)/T/EWP(1) IJP(c)

SOURCE CODE: UR/0044/65/000/012/B125/B126

ACC NR: AR6016622

AUTHOR: Eterman, I. I.

TITLE: Problem of approximate solution of integral and differential equations, ordinary and partial

SOURCE: Ref. zh. Matematika, Abs. 12B662

REF SOURCE: Uch. zap. Penzenek. politekhn. in-t, vyp. 1, 1964, 90-97

TOPIC TAGS: approximate solution, parabolic differential equation, elliptic differential equation

ABSTRACT: The author considers the asymptotic polynomials

$$Q_n(f, x) = \sum_{k=0}^{n+1} f_k \pi_k^{(n)}(x) \quad (1)$$

with parameters of accuracy

$$L_n(f) = \frac{1}{2(n+1)} \left[f_0 + (-1)^{n+1} f_{n+1} + 2 \sum_{k=1}^n (-1)^k f_k \right] \quad (2)$$

where

$$\pi_k^{(n)}(x) = \begin{cases} \frac{T_n(x) - T_{n+1}(x)}{2(n+1)(1-x)} & \text{for } k=0, \\ (-1)^k \frac{T_n(x) - \eta_k T_{n+1}(x)}{(n+1)(\eta_k - x)} & \text{for } k=1, \dots, n, \\ (-1)^n \frac{T_n(x) + T_{n+1}(x)}{2(n+1)(1+x)} & \text{for } k=n+1, \end{cases} \quad (3)$$

UDC: 518

L 45405-66

ACC NR: AR6016622

0

$\eta_k = \cos \frac{k\pi}{n+1}$ ($k=0, 1, \dots, n+1$), $f(\eta_k) = f_k$, $T_n(x) =$
 $= \cos n \arccos x$, which is an efficient instrument for approximating functions
 $f(x) \in C(a,b)$. In previous work (RZhMat, 1963, 8B82; 1964, 4B647) the author studied
 applicability of asymptotic polynomials to the solution of problems in applied math-
 ematics. In the form of an asymptotic polynomial he obtained an approximate solution
 of the Fredholm equation of type 2. The proposed method can be used for a wide class
 of nonlinear problems. By this method one can also approximately solve both Cauchy
 problems and multi-point boundary value problems for ordinary differential equations.
 Under the conditions

$$\begin{aligned} \varphi(-1, t) &= u_1(t), \\ \varphi(1, t) &= u_2(t), \\ \varphi(x, 0) &= f(x) \quad -1 < x < 1. \end{aligned} \quad (4)$$

the parabolic equation

$$\frac{\partial^2 \varphi}{\partial x^2} = F\left(\frac{\partial \varphi}{\partial x}, \frac{\partial \varphi}{\partial t}, \varphi, x, t\right) \quad (5)$$

can be approximately solved with the help of asymptotic aggregates. Boundary value
 problems for elliptic equations

$$\frac{\partial^2 \varphi}{\partial x^2} + \frac{\partial^2 \varphi}{\partial y^2} = \psi\left(\frac{\partial \varphi}{\partial x}, \frac{\partial \varphi}{\partial y}, \varphi, x, y\right) \quad (6)$$

are also solved analogously. Bibliography 5 titles. D. Topolyanskiy [Translation of
 abstract]

SUB CODE: 12

ACCESSION NR: AP4042545

S/0140/64/000/004/0169/0176

AUTHOR: Eterman, I. I. (Penza)

TITLE: Solution of two problems in applied mathematics by means of special approximating polynomials

SOURCE: IVUZ. Matematika, no. 4, 1964, 169-176

TOPIC TAGS: asymptotic polynomial, approximation polynomial, best approximation polynomial, transcendental equation solution, iterative method, quadrature formula

ABSTRACT: In an earlier series of articles the author introduced asymptotic polynomials

$$Q_n(x) = \sum_{k=0}^{n+1} f_k w_k^{(n)}(x),$$

where $w_k^{(n)}(x)$ represent certain expressions containing trigonometric functions, which were used for approximating the function $f(x)$. In

Card 1/3

ACCESSION NR: AP4042545

the present work these polynomials are used for the approximate solution of transcendental equations and the construction of a quadrature process. The method proposed for the solution of the transcendental equation $f(x) = 0$ consists in the approximation of the function $f(x)$ on the interval $[a, b]$ by the asymptotic polynomial $Q_2^{(1)}(x)$ and the approximate solution of the approximated equation $Q_2^{(1)}(x) = 0$. The root x_1 of this equation is the approximate solution of the transcendental equation. By taking the subinterval of the interval $[a, b]$, with the center at the point x_1 and the corresponding asymptotic polynomial $Q_2^{(2)}(x)$, the second approximation equation $Q_2^{(2)}(x) = 0$ is derived from which x_2 is solved. Continuing this iterative process, the sequence x_1, x_2, \dots, x_n is established, and its convergence to the solution of the transcendental equation is proved. It is shown that the proposed iterative method is rapidly convergent and has a very simple calculation procedure. For the approximate integration of

$$\int_{-1}^{+1} f(x) dx,$$

Card 2/3

ACCESSION NR: AP4042545

the integrand is substituted by an asymptotic polynomial $Q_n(x)$, and the general quadrature formula is derived. It is proved that for every continuous function $f(x)$, this formula is convergent, and the rate of convergence depends on the structural properties of the integrand. The estimate for the remainder term is derived. It is shown that the quadrature formula derived can be applied to obtain an interpolation formula for the numerical solution of the differential equation $dy/dx = \phi(x, y)$. Orig. art. has: 38 formulas.

ASSOCIATION: none

SUBMITTED: 22Oct62

ATD PRESS: 3071

ENCL: 00

SUB CODE: MA

NO REF SOV: 005

OTHER: 000

Card 1 3/3

ACC NR: AP7009574

SOURCE CODE: UR/0140/66/000/006/0161/0169

AUTHOR: Eterman, I. I. (Panza)

ORG: none

TITLE: Approximate solution of differential and integral equations with the aid of asymptotic polynomials of the second kind

SOURCE: IVUZ. Matematika, no. 6, 1966, 161-169

TOPIC TAGS: polynomial, approximate solution, Fredholm equation, Volterra equation

SUB CODE: 12

ABSTRACT: Approximate solutions of integral and differential equations are found in the form of asymptotic polynomials of the second kind. Convergence of the solutions to exact solutions with unlimited increase of the order n is proven. (This paper is as given at a Saratov University Conference on 21 Feb 1964, and an abbreviated version, without proofs, was published elsewhere.) It is shown that asymptotic polynomials of the first and second kind and their parameters are related by integral relations and that the parameters M_n possess characteristic properties. An integral, second-order Fredholm equation is examined, and it is proved that the asymptotic polynomial $R_n(x)$ approximates the solution $f(x)$ of this equation with any desired degree of accuracy. A linear differential equation is transformed into an integral second-order Volterra equation and then into the Fredholm equation. An asymptotic polynomial of the second kind is found for which the solution of the final equation converges uniformly to any desired degree of accuracy. An example is given of using the method for solving a class of boundary value and multipoint problems.

Orig. art. has: 34 formulas. [JPRS: 40,050]

Card 1/1

UDC: 517.43
0930 1/102

—Kobrin, I. M.

"Calculation method of the program of a milling machine."

Programmed Control of Metal Cutting Machines. report presented at
All-Union Conference, Moscow, 13-16 Nov 1957
Vestnik Ak. Nauk SSSR, 1958, No. 2, pp. 113-115, (author Kobrinskiy, A. Ye.)

MIHALIK, Albin; ETESI, Jozsef

Engineers or technicians? Musz elat 19 no. 6:5 12 Mr '64.

1. Zipernovszky Karoly Gepipari Technikum, Pecs (for Mihalik)
2. Kando Oregdiakok Kore titkara, Budapest (for Etesi).

ACC NR: AP6026749

(A)

SOURCE CODE: FO/0055/66/000/009/0257/0259

AUTHOR: Filipczynski, Leszek (Doctor; Engineer; Director); Luty, Wacław (Dr.; Eng.); Etienne, Jerry (Master Engineer)

~~Filipczynski; Etienne~~

ORG: Laboratory for the Passive Applications of Ultrasound of the Institute for the Investigation of Vibrations of the IPPT - Polish AS, Warsaw (Pracownia Biernych Zastosowan Ultradzwiekow Zakladu Badania Drgan IPPT-PAN) ; ~~Luty~~ Institute of Precision Mechanics, Warsaw (Instytut mechaniki precyzyjnej)

TITLE: Testing fatigue strength by the ultrasound method

TOPIC TAGS: fatigue strength, fatigue test, ultrasound absorption, ultrasonics, ultrasonic sensor, structural steel, bearing steel / 16H2N2ME structural steel, LH15 bearing steel

ABSTRACT: The article reports on tests carried out on type 16H2N2ME structural steel and on type LH15 quenched, low tempered bearing steel which had been smelted by two different processes: in an arc furnace and terminal deoxidation with the aid of Si and Al (normal steel) and as above but with vacuum deoxidation in the ladle with the aid of carbon dissolved in the steel before the addition of Si and Al (Vacuum deoxidized steel) in order to determine the effect of the smelting process on the fatigue strength during vibratory strength compression-stretching. The investigation was undertaken because the wider application of ultrasound methods using the high power and high vibration frequency (up to 23 kc) devices for this kind of testing developed and perfected at the Department for the Design of Prototypes of the Institute of Fundamental Technological Problems (Zaklad Konstrukcji Prototypow Instytutu Podstawowych Problemow) in Poland requires exhaustive testing to determine the effect of high

Card 1/2

ACC NR: AP6026749

vibration frequencies on fatigue strength. These new devices make it possible to shorten test time by 230 times. The comparative testing by the classical method of the steel samples mentioned above makes it possible to determine the scope of applicability of the ultrasound method to fatigue testing. Comparison of the test results in the case of the type L115 which were obtained by the ultrasound and conventional methods does not exhibit satisfactory agreement. Agreement between the results obtained by the two methods for the type 16H2N2MB steel is considered satisfactory within the limited scope of fatigue strength. Orig. art. has 7 figures and 1 table.

SUB CODE: 11,20/ SUBM DATE: none/ ORIG REF: 001/ OTH REF: 001/

Card 2/2

ACC NR: AP6026749 (A) SOURCE CODE: PO/0035/66/000/009/0257/0259

AUTHOR: Filipczynski, Leszek (Doctor; Engineer; Director); Luty, Wacław (Dr.; Eng.); Etienne, Jerzy (Master Engineer)

ORG: Filipczynski; Etienne
Laboratory for the Passive Applications of Ultrasound of the Institute for the Investigation of Vibrations of the IPPT - Polish AS, Warsaw (Pracownia Biernych Zastosowań Ultradźwięków Zakładu Badania Drgan IPPT-PAN); Luty Institute of Precision Mechanics, Warsaw (Instytut mechaniki precyzyjnej)

TITLE: Testing fatigue strength by the ultrasound method

TOPIC TAGS: fatigue strength, fatigue test, ultrasound absorption, ultrasonics, ultrasonic sensor, structural steel, bearing steel / 16H2N2MB structural steel, LH15 bearing steel

ABSTRACT: The article reports on tests carried out on type 16H2N2MB structural steel and on type LH15 quenched, low tempered bearing steel which had been smelted by two different processes: in an arc furnace and terminal deoxidation with the aid of Si and Al (normal steel) and as above but with vacuum deoxidation in the ladle with the aid of carbon dissolved in the steel before the addition of Si and Al (Vacuum deoxidized steel) in order to determine the effect of the smelting process on the fatigue strength during vibratory strength compression-stretching. The investigation was undertaken because the wider application of ultrasound methods using the high power and high vibration frequency (up to 23 kc) devices for this kind of testing developed and perfected at the Department for the Design of Prototypes of the Institute of Fundamental Technological Problems (Zakład Konstrukcji Prototypów Instytutu Podstawowych Problemów) in Poland requires exhaustive testing to determine the effect of high

Card 1/2

ACC NR: AP6026749

vibration frequencies on fatigue strength. These new devices make it possible to shorten test time by 230 times. The comparative testing by the classical method of the steel samples mentioned above makes it possible to determine the scope of applicability of the ultrasound method to fatigue testing. Comparison of the test results in the case of the type IH15 which were obtained by the ultrasound and conventional methods does not exhibit satisfactory agreement. Agreement between the results obtained by the two methods for the type 16H2N2MB steel is considered satisfactory with in the limited scope of fatigue strength. Orig. art. has 7 figures and 1 table.

SUB CODE: 11,20/ SUBM DATE: none/ ORIG REF: 001/ OTH REF: 001/

ETIGEN, L.Ye. (Dushanbe, 3, prospekt Lenina, 110, kv.24)

Possibility of using fluorescence microscopy for the study of
the functional morphology of the ovary. Arkh. anat., gist. i
embr. 44 no.6:80-86 Je '63. (MIRA 17:7)

1. Kafedra normal'noy anatomii (zav.-chlen-korrespondent AMN SSSR
prof. D.A. Zhdanov) I Moskovskogo ordena Lenina meditsinskogo in-
stituta i kafedra normal'noy anatomii (zav. chlen-korrespondent AN
Tadzhikskoy SSR zasluzhennyy deyatel' nauki Ye.A. Rakhimov) Tadzhikskogo
meditsinskogo instituta, Dushanbe.

PA76T28

ETIN, A. O.

USSR/Engineering
Machines, Milling
Worms

Mar 1948

"Profiling of Worm Miller for Finished Cylindrical
Gears Prior to Shaving," A. O. Etin, Cand Tech Sci,
M. D. Genkin, 54 pp

"Stanki 1 Instrument" No 3

Describes processes performed for facilitating work
of shaving a screw worm on various parts of machines
to determine methods for more efficient clearing of
the teeth of the shaver.

76T28

ETIN, A. O.

Subject : USSR/Engineering AID P - 5037
Card 1/1 Pub. 103 - 8/22
Authors : Etin, A. O. and E. S. Kovrigina
Title : Overlapping milling by multiple-thread milling cutters
Periodical : Stan. i instr., 4, 25-27, Ap 1956
Abstract : The authors describe the new more efficient method and equipment for the overlapping multiple-thread milling of small outside threading on automatic and semi-automatic machines. The new method has been developed by the Experimental Scientific Research Institute of Metal Cutting Machines (ENIMS). Seven drawings and 1 photo.
Institution : As above
Submitted : No date

S/121/60/000/008/002/012
A004/A002

Determining the Field of Application of Different Machining Methods

in the form of a continuous function of the parameters of the part surface to be machined (correlation of dimensions determining the surface shape and magnitude of allowance to be removed). Using the sole determination of the cutting parameters developed by ENIMS, it is possible to obtain comparable expressions of the average thickness of cut a_{av} for any machining method. If these expressions are substituted in the ordinary formulae of the basic technological time, the following function is obtained:

$$t_b = \frac{f(A)}{a_{av} v},$$

where A = dimensional parameters of the machined surface and some tool parameters. The author presents a number of examples for the derivation of similar functions, and of a comparative analysis of the most efficient machining methods under large-series and mass production conditions for threading operations, which are carried out either by hard alloy cutting tools, threading heads with inserted round or plane cutting dies or by disk cutters. Comparative graphs of these operations are given. There are 4 graphs and 3 Soviet references.

Card 2/2

ETIN, A.O.; GRACHEV, L.N.

Use of contour and multicut machining. Stan.i instr. 34 no.7:
1-7 JI '63 (MIRA 16:9)
(Metal cutting)

ETIN, A.O., kand. tekhn. nauk; VLADZIYEVSKIY, A.P., doktor tekhn.
nauk, prof., red.

[Kinematic analysis of the methods of metal cutting] Kinema-
ticheskiy analiz metodov obrabotki metallov rezaniem. Moskva,
Izd-vo "Mashinostroenie," 1964. 321 p. (MIRA 17:5)

GLADKOV, B.A.; ETIN, A.O.; SHUMYATSKIY, B.L.

Determining the parameters of lathes. Stan. i instr. 35
no.3:27-33 Mr'64. (MIRA 17:5)

BARBARINA, T.M.; BUBYR', N.F.; BUTT, L.M.; VEL'SOVSKIY, V.N.;
GORLOV, Yu.P.; GRIBANOVSKIY, V.G.; DROZDOV, I.Ya.;
YEREMIN, I.A.; ZEZIN, V.G.; KEVESH, P.D.; KOCHAROV, E.P.;
KOSYREVA, Z.S.; LEVIN, S.N.; MAKHOVICH, A.T.; MERZLYAK,
A.N.; RODOV, E.S.; ROZNOV, A.I.; SEREBRYANSKAYA, B.I.;
SUKHAREV, M.F.; USTENKO, A.A.; KHOMENKO, Z.S.; SHMIDT,
L.M.; ETIN, A.O.; YAKHONTOVA, N.Ye.; KITAYTSEV, Vladimir
Andreyevich, prof., doktor tekhn. nauk, red.; SKRAMTAYEV,
B.G., glav. red.; TROKHIMOVSKAYA, I.P., zam. glav. red.;
KRAVCHENKO, I.V., red.; KITAYGORODSKIY, I.I., red.;
KRZHEMINSKIY, S.A., red.; ROKHVARGER, Ye.L., red.; BALAT'YEV, P.K.
red.

[Manual on the manufacture of heat insulating and acous-
tical materials] Spravochnik po proizvodstvu teploizo-
liatsionnykh i akusticheskikh materialov. Moskva, Stroi-
izdat, 1964. 524 p. (MIRA 18:1)

ETIN, A.O.; SHUMYATSKIY, B.L.

Analysis of the use of lathes with numerical program control. Stan.
i in tr. 36 no.4:3-8 Ap '65. (MIRA 18:5)

ETIN, G., inzhener.

~~XXXXXXXXXX~~ Finishing pedestals and portals. Stroitel' no.3:2-3 Mr '57.

(MLBA 10:6)

1. Trest No.18 Ministerstva gorodskogo i sle'skogo stroitel'stva
BSSR.

(Doorways)

(Plastering)

ETIN, G., inzh.

~~Facing slabs imitating granite. Stroitel' no.1:26 Ja '58.~~
(Building blocks)

(MIRA 11:2)

ETIN, G., inzh.

Floors made of polyvinyl chloride tiles. Zhil. stroi. no.12:21
'61. (MIRA 15:2)
(Ethylene) (Floor coverings)

SAGALOVICH, Iosif Aronovich, inzh.; LIBO, Vul'f Ziselevich, inzh.;
KOPELEVICH, Aron Markovich, inzh.; ~~ETIN, Gennadiy Yefimovich,~~
inzh.; TERESHCHENKO, V., red.; KALECHITS, G., tekhn.led.

[Technological innovations in finishing operations] Novoe
v tekhnologii otdelochnykh rabot. Minsk, Gos.izd-vo BSSR, Red.
proizvodstvennoi lit-ry, 1960. 51 p. (MIRA 14:3)

1. Trest "Otdelstroy" No.7 Ministerstva stroitel'stva BSSR (for
Sagalovich, Libo, Kopelevich, Etin).
(Building--Technological innovations)

ETIN, G., starshiy inzh.

New building materials. MIO 3 no.12:31 D '61. (MIRA 15:1)

1. Trest Otdelstroy No.7.
(Latex)

ETIN, G., inzh.

Facing walls with polystyrene tiles. Zhil.stroi. no.3:27
'62. (MIRA 15:9)

(Tiles)

ETIN, Gennadiy Yefimovich; GURIN, N., red.; VARENIXOVA, V.T.,
tekh. red.

[Synthetic materials in the finishing of buildings] Sinteticheskie materialy v otdelke zdani. Minsk, Gos.izd-vo BSSR. Red. proizvodstvennoi lit-ry, 1962. 44 p.
(MIRA 16:4)

(Building materials)
(Finishes and finishing)

ROL'NIK, Mikhail Abramovich; ~~FTIN, Iosif Zus'yevich; ASTAKHOV, A.V.,~~
red.izd-va; MINSKER, L.I., ~~tekhn.izd.~~

[Expert in mine communication] Master shakhtnoi svyazi.
Moskva, Gos.nauchno-tekhn.izd-vo lit-ry po gornomu delu,
1961. 237 p. (MIRA 14:4)
(Mine communications)

ANDREYEV, V.I., inzh.; ETIN, I.Z., inzh.

Automatic forging with hydraulic presses. Mashinostroenie
no. 351-52 My-Je '65. (MIRA 18:6)

GRETISOV, V.L., dotsent; GLAVATSKIY, V.V., inzh.; ETIN, I.Z.

Investigating length of service, damage and basic indices of
the reliability of mine telephone cables. Ugol' Ukr. 10 no.1:
26-28 Ja '66. (MIRA 18:12)

1. Khar'kovskiy institut gornogo mashinostroyeniya, avtomatiki
i vychislitel'noy tekhniki (for Gretsov, Glavatskiy). 2. Nachal'-
nik svyazi kombinata Donetskugol' (for Etin).

ETIN, M.

TA 6/10715

USSR/Engineering Apr 48
Engines, Diesel - Starting
Engines, Diesel - Cold Weather Operating

"Starting Diesels at Low Temperatures," I.
Stepanenko, M. Etin, Engineers, 1½ pp

"Avtomobil'" No 4

Chief difficulties in cold weather starting are:
(1) air temperature at end of compression being too low; (2) viscous fuel causing poor atomization; (3) viscous lubricating oil making combustion difficult. Discusses heating air inlet, heating cylinder walls, decreasing fuel viscosity with tractor kerosene, using ether as a primer, heating crankcase oil, starting by towing.

6/10715

ETIN, Il'ya Zinov'yevich; SHABADAKH, Askol'd Nikolayevich;
POLONSKIY, Mikhail Vladimirovich; KAMNEV, P.V., red.;
TELYASHOV, R.Kh., red.izd-va; BELOGUROVA, I.A., tekhn.
red.

[Automation of forging processes and the measurement of forgings
on forge presses with the help of radioisotopes] Avtomatizatsiya
protsessov kovki i izmerenie pokovok na kovochnykh pressakh pri
pomoshchi radioaktivnykh izotopov. Leningrad, 1963. 25 p.
(leningradskii dom nauchno-tekhnicheskoi propagandy. Obmen pe-
redovym opytom. Seriya: Kovka i shtampovka, no.2) (MIRA 16:5)
(Forging) (Automation)
(Radioisotopes—Industrial applications)

L 26379-66

ACC NR: AP6007722

(N)

SOURCE CODE: UR/0413/66/000/003/0133/0134

AUTHORS: Tsololo, A. P.; Etin, V. L.

12
B

ORG: none

TITLE: Cargo boat. Class 65, No. 178697

SOURCE: Izobreteniya, promyshlennyye obraztsy, tovarnyye znaki, no. 3, 1966, 133-134

TOPIC TAGS: ship, marine engineering, cargo vehicle, river transport

ABSTRACT: This Author Certificate describes a cargo boat whose hull is equipped with several detachable cylindrical shell tanks for fluid loading. Rigidly fastened between the tanks are floor plates. The purpose of the equipment (see Fig. 1) is to avoid empty trips of the craft, to lower the materials cost of its construction, and to facilitate the scouring of tanks for removal of fluid loads. The middle shell tanks are constructed with a lesser diameter than that of the outboard tanks, and the latter support twin side decks. These, together with the deck of the second bottom on the floor plates and the walls of the outboard shells form a hold for dry loads.

2

Card 1/2

ENC. 620.123.563.620.12.011.173

L 26379-66

ACC NR: AP6007722

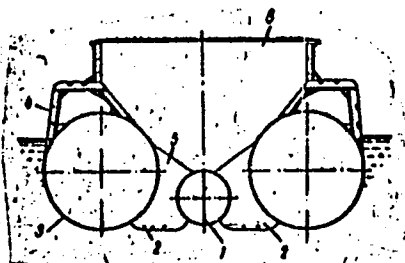


Fig. 1. 1 - center detachable cylindrical shell tanks; 2 - floor plates; 3 - outboard cylindrical shell tanks; 4 - twin side decks; 5 - deck of the second bottom on the floor plates; 6 - hold for dry loads.

Orig. art. has: 1 figure.

SUB CODE: 13/ SUBM DATE: 30Jul63

Card 2/2 CC

YABLOKOV, A.V.; ETIN, V.Ye.

Analysis of color variation in different populations of muskox.
as exemplified by Greenland seal. Zool. Zhur. 44 no. 7:1103-1106
'65. (NHLA 1219)

1. Institut morfologii zhivotnykh Akademii nauk SSSR, Moscow.

ETIN, Yuriy Benitsianovich; ZASORIN, V.I., red.

[Experience in the organization of work in using electronic computers] Opyt organizatsii raboty na elektronnykh vychislitel'nykh mashinakh. Leningrad, 1965. 15 p.
(MIRA 18:7)

BOROVSKIY, I.B.; PREDVODITOLov, A.A.; TYAPUNINA, N.A.; ETINA, Ye.V.

Relation between impurity distribution and dislocations in cadmium
crystals. Kristallografiia 7 no.4:600-603 J1-Ag '62.

(MIRA 15:11)

1. Moskovskiy gosudarstvennyy universitet, Moskva.
(Dislocations in crystals)

AKIM, L.Ye.; KARPINSKIY, M.N.; ROMANENKO, V.A.; ETINA, Yu.Ya.

Changes of the functional groups of viscose cellulose in the process
of its bleaching. Zhur.prikl.khim. 35 no.11:2534-2538 N '62.

(MIRA 15:12)

(Cellulose)

(Bleaching)

ETINBERG, E., kand.tekhn.nauk; PRINIMALA uchastiye Oganessian, I.A., inzh.

Study of the hydraulic losses of adjustable blade hydraulic
turbines. Energomashinostroenie 7 no.4:8-11 Ap '61.

(MIRA 14:7)

(Hydraulic turbines)

LESOKHIN, I. M.

The application of the method of A. F. Lesokhin for the computation of rotor blades of a rotation-blade hydraulic turbine and the determination of the cavitation efficiency factor. "Inzhinernyy Sbornik" by Academy of Science of the USSR, Department of Technical Sciences, Institute of Mechanics. 1955.

124-57-2-1917

Translation from Referativnyy zhurnal, Mekhanika, 1957, Nr 2, p 63 (USSR)

AUTHOR: Etinberg, I. E.

TITLE: The Influence of the Geometric Parameters of Runner Blades on the Cavitation Properties of a Variable-pitch-blade Hydraulic Turbine (Vliyaniye geometricheskikh parametrov lopastey rabocheho koleasa na kavitatsionnyye kachestva povorotnolopastnoy gidroturbiny)

PERIODICAL: Gidroturbostroyeniye. Nr 1. Moscow-Leningrad, Mashgiz, 1955, pp 63-80

ABSTRACT: The results of theoretical calculations on the cavitation turbine parameter σ' (corresponding to the inception of cavitation) by means of the dependence of σ' on the relative velocity of the flow past the rotor-blade profiles at the point of the lowest pressure. The value of the relative velocity was calculated by the method of A. F. Lesokhin (ref. RZhMekh, 1954, 4781) which permits the determination of the velocity distribution on the blade profile from certain given quantities, namely, the lifting force, the geometric parameters of the profile and the cascade, and the kinematic conditions of the flow. The effect of the cascade density l/t on σ'

Card 1/2

124-57-2-1917

The Influence of the Geometric Parameters of Runner Blades (cont.)

is indicated, and it is observed that, starting from $l/t \leq 1$ a sharp increase in σ occurs. On the basis of the relationship shown on the graph $\sigma(l/t)$, recommendations are offered on the design of blades for variable-pitch blade turbines for smallest possible σ . The problem of the limiting, minimal σ is analyzed. As a result of an analysis of the effect of the profile camber on σ , and in order to prevent cavitation, it is recommended that the minimal camber be located closer to the leading edge of the blade profile and that profiles of small camber be employed. From sample calculations of σ on several cascades comprising profiles with different maximum-thickness locations, it is recommended that profiles be used in which the maximum thickness is located at a chordwise distance of 33 to 40 percent from the leading edge.

K.K. Shal'nev

1. Turbines--Cavitation
2. Turbines--Mathematical analysis

Card 2/2

ETINBERG, I. E.

3347. Etinberg, I. E. Application of Lesokhin's method for designing of Kaplan turbine vanes and computation of the cavitation parameter σ (in Russian), Izvestiya. Sbornik. Akad. Nauk SSSR 21, 163-179, 1955.

The basis of the method is the assumption that (1) the flow in the runner of a Kaplan turbine does not show any radial component of speed, and (2) that the flow around the vanes in each cylindrical section of the runner is equal to the flow around the vanes of a straight infinite cascade of airfoils, resulting when the cylindrical section of the runner in question is projected into a plane. Author attempts to refer the calculation of runner vanes and their three-dimensional flow to the calculation of a straight, plane, and infinite cascade of airfoils. To this latter calculation method, the well-known singularity method is applied, in which the airfoils are replaced by a continuous distribution of vortex and source sinks. Furthermore, a source is arranged at each inlet edge of blade, thereby attaining a round shape of the inlet edge. At first: the

mean line of the airfoil in cascade is calculated. The second step investigates the profile form.

For the calculation the following will be assumed as existing: Distance of the airfoils t , vane length l , maximum thickness δ , rounding-off radius at the inlet edge ρ , angle at the trailing edge θ , and the mean flow without cascade of airfoils w_∞ . The calcu-

Ettinger, I.E.

lation is conducted according to the method of successive approximations, whereby the speeds produced by the airfoils in cascade were taken from design charts. In calculating the induced speeds of the isolated airfoil, the local curvature of the mean line is to be considered closely.

Reviewer comments that the process is an approximate, however sufficiently exact, calculation method of the plane, straight, and infinite cascade of airfoils. The application of the method in calculating the form of the vanes of Kaplan runners is entirely groundless and hardly permissible for the following reasons: (1) In the runner of the Kaplan turbine, radial speeds cannot be avoided (Stracheletzky, "Significance of the radial speed component in the runner of Kaplan turbines," *Vaub-Konstruktion und Forschung* no. 1, 1955). (2) The flow around the vanes of an axial flow runner is not equivalent to a two-dimensional flow through a straight, plane, and infinite cascade of airfoils (AMR 5, Rev. 3205).

The application of this method for calculating Kaplan runners, having usually a few vanes and rather small hub ratios may lead under some circumstances to considerable errors. The designer who intends to calculate Kaplan turbine runners on the basis of this method must rely fully on expensive tests.

M. Stracheletzky, Germany

2/12

(5)

mt

ETINBERG, I. E.

KOLTON, A.Yu., kand. tekhn. nauk; ETINBERG, I.M., kand. tekhn. nauk.

Investigation and development of a high-speed adjustable-blade
runner. [Trudy] LMZ no. 4:5-18 '57. (MIRA 11:4)
(Hydraulic turbines)

124-58-6-6685

Translation from: Referativnyy zhurnal, Mekhanika, 1958, Nr 6, p 54 (USSR)

AUTHOR: Etinberg, I. E.

TITLE: On the Pressure Losses in the Runners of Variable-pitch-blade Turbines (K voprosu o poteryakh napora v rabochikh kolesakh povorotnolopastnykh turbin)

PERIODICAL: V sb.: Gidroturbostroyeniye. Vol 4. Moscow-Leningrad, Mashgiz. 1957, pp 19-36

ABSTRACT: A method of evaluating the losses in the runners of variable-pitch-blade turbines is proposed, wherein experimental data obtained from model experiments are employed and wherein the coefficients obtained are referred to some mean cylindrical cross section. The profile-drag coefficient of the cascade is given by an empirical function of the lift coefficient. The changes in the losses are investigated in terms of the working conditions of the turbine and the basic geometric parameters of the runner, and the optimum flow rate and rpm resulting in a minimum loss are determined. For the purpose of illustration of the fundamental method, the experimental data of three types

Card 1/2

124-56-6-6685

On the Pressure Losses in the Runners of Variable-pitch-blade Turbines (cont.)
of runners designed according to the method of A. F. Lesokhin, with blades
pertaining to the same class, are given.

N. A. Kolokol'tsov

1. Turbine blades--Performances

Card 2/2

ETINBERG, I. E.

25(2); 10(4)

PHASE I BOOK EXPLOITATION

SOV/1421

Kolton, Abram Yudovich, and Isaak El'yevich Etinberg

Osnovy teorii i gidrodinamicheskogo rascheta vodyanykh turbin (Principles of Theory and Hydrodynamic Design of Hydraulic Turbines)
Moscow, Mashgiz, 1958. 357 p. 3,000 copies printed.

Reviewer: L.A. Simonov, Doctor of Technical Sciences; Ed.: V.P. Gur'yev, Candidate of Technical Sciences; Ed. of Publishing House: Ye.K. Gofman; Tech. Ed.: R.G. Pol'skaya; Managing Ed. for Literature on the Design and Operation of Machinery (Leningrad Division, Mashgiz): F.I. Fetisov.

PURPOSE: This book is intended for designers and researchers in the field of hydraulic machinery building and may also be used by students specializing in power-machinery building.

COVERAGE: The book deals with problems of hydrodynamics related to hydraulic reaction turbines. Basic theoretical principles and modern methods of hydrodynamic design for various types of turbines are presented. In preparing the material the authors utilized the valuable experience of **LMZ** (Leningrad Metal Works) and followed,
Card 1/8

Principles of Theory (Cont.)

SOV/1421

in general, the approach developed by I.N. Voznesenskiy, A.F. Lesokhin, and L.A. Simonov. Use was made of experimental work, done by the hydraulic turbine laboratory of the Leningrad Metal Works and research done by VIOM (All-Union Institute of Hydraulic-machinery Building), the Leningrad Polytechnic Institute imeni Kalinin, and the Moscow Higher Technical School imeni N.Ye. Bauman. Chapters I,V,VI, and VIII were written by I.E. Etnberg, and Chapters II,III,IV,VII and IX by A.Yu. Kolton. The authors thank personnel of the design department and laboratory of the Leningrad Metal Works and their supervisor N.N. Kovalev, Corresponding Member of the Academy of Sciences, USSR, for valuable assistance in preparing the book. There are 40 references, 39 of which are Soviet, and 1 English.

TABLE OF CONTENTS:

Foreword	3
Ch. I. Purpose of Hydromechanical Design and Principles for Model Testing Hydraulic Turbines	5
1. General premises	5
Card 2/8	

Principles of Theory (Cont.)

SOV/1421

2. Principles for model testing hydraulic turbines	7
3. Cavitation phenomena in hydraulic turbines and the cavitation coefficient	15
Ch. II. Hydromechanical Principles of Hydraulic Reaction Turbines	19
4. Basic concepts	19
5. Axially-symmetrical flow	20
6. Graphical-analytical method of plotting meridional axially-symmetrical potential flow	26
7. Basic assumptions on the form of flow in various types of turbines	32
8. The basic turbine equation	34
Ch. III. Application of the Profile-grid Theory to the Design of Axial-flow Turbine Runner Wheels	37
9. Basic concepts	37
10. Zhukovskiy [Joukowski] theorem of lift	41
11. Determination of forces acting on the grid profile during plane-parallel flow of an ideal fluid	43
12. Relationship between circulation and the direction of	

Card 3/8

Principles of Theory (Cont.)	SOV/1421	
inflow		46
13. Derivation of the relationship between velocities ahead of and behind the grid		48
14. Determination of axial-turbine shaft torque		53
15. The lift method		54
16. Basic methods of calculation for plane potential flow through straight profile grids		57
17. Use of the method of particularities in solving the problem of flow around a body		61
18. Calculation of flow around a thin and slightly-cranked wing		73
19. Lesokhin-Simonov method of designing profile grids of infinitely small thickness at a given distribution of vortexes		81
20. Method of calculating a flow around the grids of infinitely thin profiles of a given form		88
21. Electrohydrodynamic analogy method (EGDA)		91
Ch. IV. Spiral Casings		100
22. Form of flow in a spiral casing		100
23. Design of tee cross section spiral casings		103
Card 4/8		

Principles of Theory (Cont.)

SOV/1421

24.	Design of circular cross section spiral casings	108
25.	Effect of spiral casing on the general characteristics of a turbine	110
26.	Design of stay-ring profiles	119
Ch. V.	Guide Apparatus	121
27.	Purpose of the guide apparatus	121
28.	Geometric parameters and basic problem of the hydraulics of radial guide apparatus	123
29.	Flow formed by the radial guide apparatus	128
30.	Height and maximum opening of guide apparatus for turbines of different speed ratings	133
31.	Head losses in the radial guide apparatus and the effect of vane profile form on the magnitude of losses	135
32.	Determination of hydrodynamic forces acting on guide-apparatus vanes	145
Ch. VI.	The Axial-flow Turbine Runner-wheel	159
33.	Relationship of an axial-flow turbine's handling capacity to the geometry of the runner wheel and its casing	159

Card 5/8

Principles of Theory (Cont.)

SOV/1421

34. Twist of flow at the exit of a runner wheel and the axial-flow regime	167
35. Relationship of angle of attack and lift coefficients to the operating regimes of a turbine	171
36. Energy losses in a runner wheel and propeller characteristics	173
37. Analysis of combined characteristics and the relationship between axial-flow turbine speeds and the geometry of a runner wheel	176
38. Twist of axial runner-wheel vanes	181
39. Type of flow through runner-wheel passages at nonrated regimes	190
40. Selection of runner-wheel design regimes	195
41. The axial-flow turbine cavitation coefficient	196
42. Relationship between the axial-flow turbine cavitation coefficient and the geometric parameters of runner-wheel vanes	202
43. Relationship between cavitation coefficient and turbine operating regimes	215
44. Determination of hydrodynamic forces acting on axial	

Card 6/8

Principles of Theory (Cont.)

SOV/1421

54. Experimental modifications of the radial-axial runner-wheel	294
55. Determination of axial forces acting on the runner-wheel of an axial-radial turbine	297
Ch. VIII. Draft Tubes	304
56. Basic information on draft tubes	304
57. Straight draft tubes	312
58. Elbow-type draft tubes	321
Ch. IX. Special Hydrodynamic Features of Axial-flow Reaction Turbines With Axial Guide Apparatus	335
59. Form of flow in axial guide apparatus	335
60. Design of the axial guide apparatus	341
61. Approximate determination of kinematic characteristics of flow in an axial-flow turbine with axial guide apparatus	346
62. Flow around the runner-wheel vanes of an axial-flow turbine (with axial guide apparatus) under propeller and combined regimes	350

Bibliography

AVAILABLE: Library of Congress

Card 8/8

GO/sfm

5-8-59

87962
S/114/60/000/007/002/009
E073/E435

Means of Improving the Cavitation Properties of High-Pressure
Kaplan Turbines

In addition to this, work should proceed on the basis of new concepts, for instance on using diagonal turbines, 2-stage runners and runners with two blades on a single bearing. The advantage of a diagonal turbine is the increase in the flow cross-section, which is obtained without increasing the size of the stator parts. The under-pressure under the runner of a diagonal turbine is lower and, therefore, the cavitation coefficient will also be lower. Twin blades have a more favourable runner hub to throat ratio. Furthermore, the blades are thinner and the lattice is denser, as a result of which they are more favourable from the cavitation point of view. Two-stage turbines can be advantageous under specific conditions but they can definitely not be considered as a universal solution. There are 3 figures, 1 table and 5 Soviet references. X

Card 2/2

ETINBERG, I.E.; GUTOVSKIY, Ye.V., kand. tekhn. nauk, retsenzent;
EDEL', Yu.U., doktor tekhn. nauk, red.

[Theory and design of the blading of adjustable-blade
hydraulic turbines] Teoriia i raschet protochnoi chasti
povorotnolopastnykh gidroturbin. Moskva, Mashinostroenie,
1965. 349 p.
(MIRA 18:5)

27

Hardening of fats and oils. E. Ya. Rabinburg and G. A. Gol'dstein. Russ. 35,939, April 30, 1934. Fats and oils are hardened at 220-70° in the presence of a catalyst obtained by treating with H_2SO_4 and hypochlorites residue from a previous hydrogenation.

ASAC-SLA METALLURGICAL LITERATURE CLASSIFICATION

REGION 110-1111111111

REGION 110-1111111111

REGION 110-1111111111

1ST AND 2ND ORDERS		PROCESS AND PROPERTIES INDEX	
<p><i>CH</i></p> <p>Hydrogenation of fats in presence of nickel carbonate reduced in the oil. H. E. Eismann. Maslobolno Zhivore. Dole 10, No. 9-10, 45 7(1934): (Chimie & Industrie 34.</p> <p>811.—The lower the pptn. and drying temp. of NiCO_3, the higher the CO_2 content. The reduction temp. increases as the CO_2 content of the carbonate decreases. The activity of the catalyst increases as the pptn., drying and reduction temps. are lowered, and also with decrease in the time of pptn. and drying. The catalyst is prepd. as follows: ppt. a soln. of 160-300 g. per l. NiSO_4 with a 15% B_6 Na_2CO_3 soln. at not over 32-45°. filter on a filter, press, wash till free from sulfates with water at 30-50°, dry 4-5 hrs. at 100-150°, grind, sieve, mix with sunflower seed oil and reduce by heating the oil in presence of H; time of reduction is 5 hrs.; the temp. is raised to 170-200° during the first hr., to 200-40° during the next 2 hrs. and to 240-5° during the last 2 hrs. Reduction of the catalyst can be carried out in the same autoclave as subsequent hydrogenation. The activity of the catalyst lasts over a prolonged period. A. Papirnan-Cature</p>		<p>27</p>	
<p>ASB-SLA METALLURGICAL LITERATURE CLASSIFICATION</p>			
<p>12000 STEEL</p>		<p>12000 STEEL</p>	
<p>12000 STEEL</p>		<p>12000 STEEL</p>	

Heating oil with low-pressure steam before hydrogenation. E. Etkinburg and M. Popov. *Moskolsko Zhurnal* Delo 11, 304-6(1915). New method of heating oil before hydrogenation. K. Dolgopulov. *Ibid.* 301-4. —Procedures and construction details are described. C. R.

ASB-SLA METALLURGICAL LITERATURE CLASSIFICATION

127280-01

127280-01

Hydrogenation of fats in presence of nickel carbonate and formate reduced in the oil. E. Kitzburg and M. Popov. *Moskobelno Zhirono Dolo* 11, 363(1935); cf. C. A. 20, 8380, 8373. -- NiCO_3 can be used in the hydrogenation of high-grade oils with low-pressure steam for heating the oil before hydrogenation. A mixt. of NiCO_3 and Ni formate can be used for the hydrogenation of low-grade oils when effective refining of the oil is not feasible.
Chas. Blanc

430-55A METALLURGICAL LITERATURE CLASSIFICATION

Selective hydrogenation (of vegetable fats). E. Krim-
berg, B. Sterlin and B. Krushevskii. *Moskolsko Zhurnal*
Dokl. 11, 471-3 (1935).—The selective process of hydro-
genation of cottonseed and sunflower oils was studied by
heating the oils in an autoclave at 180°, 185° and 200°
with 0.1, 0.2 and 0.4% Ni pptd. on kieselguhr and a
H current at a rate of 2, 3, 4 and 6 l./min. The samples
taken at definite intervals were tested for the m. p., I
and thiocyanate nos. and contents of solid acids. The
selective process of hydrogenation was detd. by the con-
tents of acid. acids formed and the linoleic acid unchanged.
Under all conditions of hydrogenation of cottonseed oil
the selectivity was greater at a higher temp. (200°).
With the increased ratio of either Ni or H the rate of
hydrogenation increases and the degree of selectivity
correspondingly declines. A selective hydrogenation can
be effected not by any definite optimum system but by
an optimum correlation of the single factors in the process.
A min. of the catalyst and a max. of H are required.
the converse is true. At a certain correlation of the
catalyst and H the temp. of the reaction can be lowered
without affecting the selectivity of hydrogenation: in
the presence of 0.1% and 0.15% Ni (based on the wt. of
oil) and H rate of 4 l./min. the selectivity is of the same
character as that at 180° (for 0.1%) and 185° and 190°
(for 0.15%). The same is true with 0.2% Ni and H rate
of 3 l./min. For the selective hydrogenation of sunflower
oil more active conditions are required. Thus, at a rate of
6 l./min. of H the selective character of hydrogenation is
greater than that of cottonseed oil. Chas. Blane

1ST AND 2ND COLUMNS		PROCESS AND PROPERTY NOTES	
CROSS ELEMENTS	<p>CH</p>	<p>Regeneration of spent catalysts. E. Etnburg, N. Ven- gerova and G. Gol'dshteln. <i>Mashinnoye Zhitoe Delo</i> 11, 574-5(1935); cf. Troyanovskii, <i>C. A.</i> 29, 8249. For the regeneration of Ni catalyst pptd. on clay, 350-400 kg. of the spent catalyst is heated, with stirring, for 30-40 min. with a sufficient amt. of 8-10% H_2SO_4. NaOH to saponify 1/2 of the fat, and then with 30% H_2SO_4. NaOH to saponify 2) 40% of the remaining fat at 90-5° for 1.5-2 hrs. The mixture is then treated with 350-400 l. of 5% H_2O - NaClO (contg. 1.4% active Cl) and 350-400 l. H_2O at 60° for 1 hr. After diln. with 2.5-4 vols. of H_2O, the mixt. is brought to a boil and allowed to settle for 3-4 hrs. The supernatant soap soln. and fat are siphoned off, the catalyst stirred with 4-5 vols. of hot H_2O (80-5°), the mixt. neutralized with H_2SO_4, and the catalyst, after filtering and washing to a neutral reaction, is dried and reactiv- ated in H_2 at 450°. Hydrogenation of sunflower oil with the regenerated catalyst gave fat mixts., m. 50- 55°. The recovery is effected with a loss of 6-10% Ni, as compared with 40-50% by the ordinary method. Chas. Blanc</p>	
		<p>ASA-11-A METALLURGICAL LITERATURE CLASSIFICATION</p>	

The activity of nickel catalyst in relation to the thermal conditions of precipitation, drying and reduction. I. Ya. Rabinburg. *Vysokaya Nafta*, 1937, 1-10 (in English 10). The Ni catalyst was prep., with and without pptn. on bleaching (1.4), by treating NiSO_4 in H_2O (200 g. of cryst. salt in 1 l.) with 10% NaOH within 15-40 min. at 0-100°, washing the filter residue at 20-30° for 3-4 hrs., drying the NiCl_2 in vacuo, in a steam box and in a CO_2 current at 20-40° for from 15 min. to 2 hrs. The powdered catalyst (2 g.) was mixed with 10 g. of refined sunflower oil at 60-80° and used in the hydrogenation of oil at 20-30° for 45 min. A hardened oil, m. pt. 5°, was obtained at 240-30° with the catalyst obtained by pptn. NiCl_2 , 60° for 45 min. A hardened oil at 70-80° for 1 hr. and re- at 240-30° in 15-20 min. The tabulated and graphed exptl. data show that with decreasing temp. of pptn. and drying of NiCl_2 the CO_2 content in the catalyst increases and the temp. for the reduction decreases. With the decrease of the temp. of pptn., drying and reduction of NiCl_2 , and the reduction of the duration of pptn. and drying, the catalyst activity increases. *Selective hydrogenation*. I. Ya. Rabinburg and B. Ya. Sterlin. *Ibid.* 20-34 (in English 34).—The selective hydrogenation was studied at 100°, 120° and 200° with cottonseed and sunflower oils with the addn. of 0.05, 0.1, 0.15, 0.2 and 0.4% Ni -bleaching catalyst in oil (0.8% Ni) and H_2 at the rates of 2, 3, 4 and 6 l. per min. The semivol. fractions of samples taken at definite intervals were analyzed by the van der Veen method (C. A. 26, 4592), and the results were

tabulated and graphed. The selectivity of hydrogenation is detd. by the optimum correlation of sep. factors and not by any one definite optimum condition. In general, it is in inverse proportion to the amt. of catalyst used and in direct relation to the temp., the other conditions being equal. The optimum rate of H_2 decreases with the increasing amt. of catalyst and the temp. of hydrogenation. The formation of two acids begins together with the hydrogenation of the linoleic acid, the proportion of which depends on the conditions of the expt., chiefly on the temp. *Oil resisting hydrogenation and methods of refining them for hydrogenation*. P. I. Botkovskaya. *Ibid.* 35-41 (in English 45). The lab. and factory tests in the alk. refining of crude olive, sunflower, mustard, corn, soybean, linseed and rapeseed oils are described. The degree of neutralization was tested by hydrogenating 50 cc. of refined oil with Ni catalyst (0.15 g. Ni) and H_2 passed at a rate of 1 l. min. for 45 min. The optimum hydrogenation temp. was for olive oil 240-30° and for the other oils 200-70°. The factors detg. the degree of neutralization and that of hydrogenation, are the initial temp. of neutralization and the concn. and excess of NaOH . The best results were obtained by stirring an oil with 50% excess of 15-17% NaOH at an initial temp. of 25-45° and a final temp. of 30-40°. The presence of P substances in the oils (up to 0.01% P) does not retard the process of hydrogenation. The reduction of P contents to a min. and even their entire removal had no effect on the rate of hydrogenation. Special tests indicated that the presence of peroxides in the oils is one of the chief causes of the retardation of hydrogenation. For the oils incapable of retarding hydrogenation after alk. refining, preliminary treatment of crude oils with activated clays or reworking of neutralized oils with unbleached Ni catalyst at 130° is recommended. Optimum conditions of refining of sep. oils are tabulated and described in detail. Approx. 15 references.

Ch

Investigation of the hydrogenation of fats. R. Ya. Flitburg, Novoe y Prilutskoye Zhurnal. Nauch.-Issledovatel. Inst. Zhirov Shornik - Yssoyas. Nauch.-Issledovatel. Inst. Zhurov Shornik - Yssoyas. Nauch.-Issledovatel. Inst. Zhurov Shornik - Yssoyas.

In the preliminary refining of rapeseed oil for hydrogenation, salting out with NaCl contg. impurities of Ca, Mg, Al and Fe causes the formation of metallic soaps that act as catalytic poisons. To obtain larger yields of the catalyst, the following reactions were used:

$$2\text{HCO}_3\text{Na} + \text{Na}_2\text{SO}_4 + 2\text{CaCl}_2 \rightarrow (\text{HCO}_3)_2\text{Ca} + \text{CaSO}_4 + 4\text{NaCl}$$
$$\text{and } (\text{HCO}_3)_2\text{Ca} + \text{NiSO}_4 = (\text{HCO}_3)_2\text{Ni} + \text{CaSO}_4$$

The NiCO₃ catalyst produced good results. The catalyst can be reused 4 or 5 times without losing its activity. It can be regenerated by treatment with alkali and hypochlorite and a subsequent extn. of Ni. Hydrogenation of rapeseed oil. E. I. Botkovskaya. Ibid. 40-60; cf. C. A. 33, 96947. — Rapeseed oil is refined by using alkali of 18°Bé. at 40° in an excess of 100%. During the deodorization after the neutralization of the oil the m. p. of the oil mass increases by 5°. Treating the oil increases the m. p. by 10° after refining with Ni salts or with oil catalyst (0.05% at 220°). Better results are obtained by adding the catalyst in 2 stages. The 1st portion of the catalyst adsorbs the protein substances and increases the activity of the 2nd portion. The Cu-Ni catalyst (at 50-60°) is the most active. Good results are obtained also with (HCO₃)₂Ni (at 58-62°). The catalysts added in the form of salts are more active than the catalysts reduced in the oil. The purity of H is very important. For hydrogenation, rapeseed oil should be neutralized with alkali of 18°Bé. (initial temp. 40-2°, excess of alkali 100-20%), allowed to settle for 3-6 hrs., washed and dried. At first 0.5 kg. of the Cu-Ni salt per ton of oil should be added, and after 1.0-1.5 hrs. at 240° another portion of (HCO₃)₂Ni equiv. to 1.2 kg. of the metal should be added. The consumption of H per ton of oil was 95.40-90.40 cu. m. Through Khim. Referat. Zhur. 1940, No. 3, 118-19. W. G. Henn

ASD S.L.A. METALLURGICAL LITERATURE CLASSIFICATION

RECORDING UNIT ONLY

RECORDING UNIT ONLY

1ST AND 2ND QUARTERS

PROCESSES AND PROPERTIES INDEX

27

CA

Repeated utilization of used catalyst. E. Ya. Eglisburg and P. A. Artamonov. *Novosy Prilozheniya Hidrogenatsionnoi Zhiror, Shornik Nauch.-Issledovatel. Inst. Zhiror* (Leningrad) 1939, 85-91; *Khim. Referat. Zhur.* 1940, No. 1, 109. The sepn. of $\text{Ni}(\text{HCO}_3)_2$ catalyst reduced in the oil from hydrogenated fat is difficult, owing to the fact that metallic Ni in a dispersed state fills the filtering cloth and contaminates the fat by passing partially through the filter. Filtering through a filter press filled with kieselguhr or with powdered NiCO_3 removes Ni completely. The method makes filtering easy and improves the color of the fat. For repeated reuse of the filtered catalyst, filter the fat mass at a temp. not higher than 120°, sep. the part of the catalyst contaminated with H_2S or impurities from the hydrogenation of low-grade fats; prevent the contamination of the used catalyst by foreign impurities; repeat the grinding of the catalyst to increase its active surface.

W. R. Henn

ASB-51A METALLURGICAL LITERATURE CLASSIFICATION

12000 121000 122000 123000 124000 125000 126000 127000 128000 129000 130000 131000 132000 133000 134000 135000 136000 137000 138000 139000 140000 141000 142000 143000 144000 145000 146000 147000 148000 149000 150000 151000 152000 153000 154000 155000 156000 157000 158000 159000 160000 161000 162000 163000 164000 165000 166000 167000 168000 169000 170000 171000 172000 173000 174000 175000 176000 177000 178000 179000 180000 181000 182000 183000 184000 185000 186000 187000 188000 189000 190000 191000 192000 193000 194000 195000 196000 197000 198000 199000 200000 201000 202000 203000 204000 205000 206000 207000 208000 209000 210000 211000 212000 213000 214000 215000 216000 217000 218000 219000 220000 221000 222000 223000 224000 225000 226000 227000 228000 229000 230000 231000 232000 233000 234000 235000 236000 237000 238000 239000 240000 241000 242000 243000 244000 245000 246000 247000 248000 249000 250000 251000 252000 253000 254000 255000 256000 257000 258000 259000 260000 261000 262000 263000 264000 265000 266000 267000 268000 269000 270000 271000 272000 273000 274000 275000 276000 277000 278000 279000 280000 281000 282000 283000 284000 285000 286000 287000 288000 289000 290000 291000 292000 293000 294000 295000 296000 297000 298000 299000 300000 301000 302000 303000 304000 305000 306000 307000 308000 309000 310000 311000 312000 313000 314000 315000 316000 317000 318000 319000 320000 321000 322000 323000 324000 325000 326000 327000 328000 329000 330000 331000 332000 333000 334000 335000 336000 337000 338000 339000 340000 341000 342000 343000 344000 345000 346000 347000 348000 349000 350000 351000 352000 353000 354000 355000 356000 357000 358000 359000 360000 361000 362000 363000 364000 365000 366000 367000 368000 369000 370000 371000 372000 373000 374000 375000 376000 377000 378000 379000 380000 381000 382000 383000 384000 385000 386000 387000 388000 389000 390000 391000 392000 393000 394000 395000 396000 397000 398000 399000 400000 401000 402000 403000 404000 405000 406000 407000 408000 409000 410000 411000 412000 413000 414000 415000 416000 417000 418000 419000 420000 421000 422000 423000 424000 425000 426000 427000 428000 429000 430000 431000 432000 433000 434000 435000 436000 437000 438000 439000 440000 441000 442000 443000 444000 445000 446000 447000 448000 449000 450000 451000 452000 453000 454000 455000 456000 457000 458000 459000 460000 461000 462000 463000 464000 465000 466000 467000 468000 469000 470000 471000 472000 473000 474000 475000 476000 477000 478000 479000 480000 481000 482000 483000 484000 485000 486000 487000 488000 489000 490000 491000 492000 493000 494000 495000 496000 497000 498000 499000 500000 501000 502000 503000 504000 505000 506000 507000 508000 509000 510000 511000 512000 513000 514000 515000 516000 517000 518000 519000 520000 521000 522000 523000 524000 525000 526000 527000 528000 529000 530000 531000 532000 533000 534000 535000 536000 537000 538000 539000 540000 541000 542000 543000 544000 545000 546000 547000 548000 549000 550000 551000 552000 553000 554000 555000 556000 557000 558000 559000 560000 561000 562000 563000 564000 565000 566000 567000 568000 569000 570000 571000 572000 573000 574000 575000 576000 577000 578000 579000 580000 581000 582000 583000 584000 585000 586000 587000 588000 589000 590000 591000 592000 593000 594000 595000 596000 597000 598000 599000 600000 601000 602000 603000 604000 605000 606000 607000 608000 609000 610000 611000 612000 613000 614000 615000 616000 617000 618000 619000 620000 621000 622000 623000 624000 625000 626000 627000 628000 629000 630000 631000 632000 633000 634000 635000 636000 637000 638000 639000 640000 641000 642000 643000 644000 645000 646000 647000 648000 649000 650000 651000 652000 653000 654000 655000 656000 657000 658000 659000 660000 661000 662000 663000 664000 665000 666000 667000 668000 669000 670000 671000 672000 673000 674000 675000 676000 677000 678000 679000 680000 681000 682000 683000 684000 685000 686000 687000 688000 689000 690000 691000 692000 693000 694000 695000 696000 697000 698000 699000 700000 701000 702000 703000 704000 705000 706000 707000 708000 709000 710000 711000 712000 713000 714000 715000 716000 717000 718000 719000 720000 721000 722000 723000 724000 725000 726000 727000 728000 729000 730000 731000 732000 733000 734000 735000 736000 737000 738000 739000 740000 741000 742000 743000 744000 745000 746000 747000 748000 749000 750000 751000 752000 753000 754000 755000 756000 757000 758000 759000 760000 761000 762000 763000 764000 765000 766000 767000 768000 769000 770000 771000 772000 773000 774000 775000 776000 777000 778000 779000 780000 781000 782000 783000 784000 785000 786000 787000 788000 789000 790000 791000 792000 793000 794000 795000 796000 797000 798000 799000 800000 801000 802000 803000 804000 805000 806000 807000 808000 809000 810000 811000 812000 813000 814000 815000 816000 817000 818000 819000 820000 821000 822000 823000 824000 825000 826000 827000 828000 829000 830000 831000 832000 833000 834000 835000 836000 837000 838000 839000 840000 841000 842000 843000 844000 845000 846000 847000 848000 849000 850000 851000 852000 853000 854000 855000 856000 857000 858000 859000 860000 861000 862000 863000 864000 865000 866000 867000 868000 869000 870000 871000 872000 873000 874000 875000 876000 877000 878000 879000 880000 881000 882000 883000 884000 885000 886000 887000 888000 889000 890000 891000 892000 893000 894000 895000 896000 897000 898000 899000 900000 901000 902000 903000 904000 905000 906000 907000 908000 909000 910000 911000 912000 913000 914000 915000 916000 917000 918000 919000 920000 921000 922000 923000 924000 925000 926000 927000 928000 929000 930000 931000 932000 933000 934000 935000 936000 937000 938000 939000 940000 941000 942000 943000 944000 945000 946000 947000 948000 949000 950000 951000 952000 953000 954000 955000 956000 957000 958000 959000 960000 961000 962000 963000 964000 965000 966000 967000 968000 969000 970000 971000 972000 973000 974000 975000 976000 977000 978000 979000 980000 981000 982000 983000 984000 985000 986000 987000 988000 989000 990000 991000 992000 993000 994000 995000 996000 997000 998000 999000 1000000 1001000 1002000 1003000 1004000 1005000 1006000 1007000 1008000 1009000 1010000 1011000 1012000 1013000 1014000 1015000 1016000 1017000 1018000 1019000 1020000 1021000 1022000 1023000 1024000 1025000 1026000 1027000 1028000 1029000 1030000 1031000 1032000 1033000 1034000 1035000 1036000 1037000 1038000 1039000 1040000 1041000 1042000 1043000 1044000 1045000 1046000 1047000 1048000 1049000 1050000 1051000 1052000 1053000 1054000 1055000 1056000 1057000 1058000 1059000 1060000 1061000 1062000 1063000 1064000 1065000 1066000 1067000 1068000 1069000 1070000 1071000 1072000 1073000 1074000 1075000 1076000 1077000 1078000 1079000 1080000 1081000 1082000 1083000 1084000 1085000 1086000 1087000 1088000 1089000 1090000 1091000 1092000 1093000 1094000 1095000 1096000 1097000 1098000 1099000 1100000 1101000 1102000 1103000 1104000 1105000 1106000 1107000 1108000 1109000 1110000 1111000 1112000 1113000 1114000 1115000 1116000 1117000 1118000 1119000 1120000 1121000 1122000 1123000 1124000 1125000 1126000 1127000 1128000 1129000 1130000 1131000 1132000 1133000 1134000 1135000 1136000 1137000 1138000 1139000 1140000 1141000 1142000 1143000 1144000 1145000 1146000 1147000 1148000 1149000 1150000 1151000 1152000 1153000 1154000 1155000 1156000 1157000 1158000 1159000 1160000 1161000 1162000 1163000 1164000 1165000 1166000 1167000 1168000 1169000 1170000 1171000 1172000 1173000 1174000 1175000 1176000 1177000 1178000 1179000 1180000 1181000 1182000 1183000 1184000 1185000 1186000 1187000 1188000 1189000 1190000 1191000 1192000 1193000 1194000 1195000 1196000 1197000 1198000 1199000 1200000 1201000 1202000 1203000 1204000 1205000 1206000 1207000 1208000 1209000 1210000 1211000 1212000 1213000 1214000 1215000 1216000 1217000 1218000 1219000 1220000 1221000 1222000 1223000 1224000 1225000 1226000 1227000 1228000 1229000 1230000 1231000 1232000 1233000 1234000 1235000 1236000 1237000 1238000 1239000 1240000 1241000 1242000 1243000 1244000 1245000 1246000 1247000 1248000 1249000 1250000 1251000 1252000 1253000 1254000 1255000 1256000 1257000 1258000 1259000 1260000 1261000 1262000 1263000 1264000 1265000 1266000 1267000 1268000 1269000 1270000 1271000 1272000 1273000 1274000 1275000 1276000 1277000 1278000 1279000 1280000 1281000 1282000 1283000 1284000 1285000 1286000 1287000 1288000 1289000 1290000 1291000 1292000 1293000 1294000 1295000 1296000 1297000 1298000 1299000 1300000 1301000 1302000 1303000 1304000 1305000 1306000 1307000 1308000 1309000 1310000 1311000 1312000 1313000 1314000 1315000 1316000 1317000 1318000 1319000 1320000 1321000 1322000 1323000 1324000 1325000 1326000 1327000 1328000 1329000 1330000 1331000 1332000 1333000 1334000 1335000 1336000 1337000 1338000 1339000 1340000 1341000 1342000 1343000 1344000 1345000 1346000 1347000 1348000 1349000 1350000 1351000 1352000 1353000 1354000 1355000 1356000 1357000 1358000 1359000 1360000 1361000 1362000 1363000 1364000 1365000 1366000 1367000 1368000 1369000 1370000 1371000 1372000 1373000 1374000 1375000 1376000 1377000 1378000 1379000 1380000 1381000 1382000 1383000 1384000 1385000 1386000 1387000 1388000 1389000 1390000 1391000 1392000 1393000 1394000 1395000 1396000 1397000 1398000 1399000 1400000 1401000 1402000 1403000 1404000 1405000 1406000 1407000 1408000 1409000 1410000 1411000 1412000 1413000 1414000 1415000 1416000 1417000 1418000 1419000 1420000 1421000 1422000 1423000 1424000 1425000 1426000 1427000 1428000 1429000 1430000 1431000 1432000 1433000 1434000 1435000 1436000 1437000 1438000 1439000 1440000 1441000 1442000 1443000 1444000 1445000 1446000 1447000 1448000 1449000 1450000 1451000 1452000 1453000 1454000 1455000 1456000 1457000 1458000 1459000 1460000 1461000 1462000 1463000 1464000 1465000 1466000 1467000 1468000 1469000 1470000 1471000 1472000 1473000 1474000 1475000 1476000 1477000 1478000 1479000 1480000 1481000 1482000 1483000 1484000 1485000 1486000 1487000 1488000 1489000 1490000 1491000 1492000 1493000 1494000 1495000 1496000 1497000 1498000 1499000 1500000 1501000 1502000 1503000 1504000 1505000 1506000 1507000 1508000 1509000 1510000 1511000 1512000 1513000 1514000 1515000 1516000 1517000 1518000 1519000 1520000 1521000 1522000 1523000 1524000 1525000 1526000 1527000 1528000 1529000 1530000 1531000 1532000 1533000 1534000 1535000 1536000 1537000 1538000 1539000 1540000 1541000 1542000 1543000 1544000 1545000 1546000 1547000 1548000 1549000 1550000 1551000 1552000 1553000 1554000 1555000 1556000 1557000 1558000 1559000 1560000 1561000 1562000 1563000 1564000 1565000 1566000 1567000 1568000 1569000 1570000 1571000 1572000 1573000 1574000 1575000 1576000 1577000 1578000 1579000 1580000 1581000 1582000 1583000 1584000 1585000 1586000 1587000 1588000 1589000 1590000 1591000 1592000 1593000 1594000 1595000 1596000 1597000 1598000 1599000 1600000 1601000 1602000 1603000 1604000 1605000 1606000 1607000 1608000 1609000 1610000 1611000 1612000 1613000 1614000 1615000 1616000 1617000 1618000 1619000 1620000 1621000 1622000 1623000 1624000 1625000 1626000 1627000 1628000 1629000 1630000 1631000 1632000 1633000 1634000 1635000 1636000 1637000 1638000 1639000 1640000 1641000 1642000 1643000 1644000 1645000 1646000 1647000 1648000 1649000 1650000 1651000 1652000 1653000 1654000 1655000 1656000 1657000 1658000 1659000 1660000 1661000 1662000 1663000 1664000 1665000 1666000 1667000 1668000 1669000 1670000 1671000 1672000 1673000 1674000 1675000 1676000 1677000 1678000 1679000 1680000 1681000 1682000 1683000 1684000 1685000 1686000 1687000 1688000 1689000 1690000 1691000 1692000 1693000 1694000 1695000 1696000 1697000 1698000 1699000 1700000 1701000 1702000 1703000 1704000 1705000 1706000 1707000 1708000 1709000 1710000 1711000 1712000 171

Hydrogenation of vegetable oils. E. Ya. Einburg.
Mashobolno Zhivotoe Delo 15, No. 1, 10 (1939), 11.
C. A. 32, 8175. —The discussion is continued. C. B.

ASA SLA METALLURGICAL LITERATURE CLASSIFICATION

ETINBERG, Z. I.: KRUSHEL'NIKOVA, L. M.

Children - Diseases

Various forms of stomatitis in children and their therapy. *Pediatrica*, No. 4, 1952.

Monthly List of Russian Accessions, Library of Congress, December 1952. Unclassified

GIL'DENSKIOL'D, R.S.; ETING, S.V.

Improved gas pipette for prolonged air sample gathering. Uch. zap.
Mosk. nauch.-issl. inst. san. i gig. no.6:60-61 '61. (MIRA 14:11)
(AIR SAMPLING APPARATUS)